LEAPER-3C HANDY FLASH WRITER

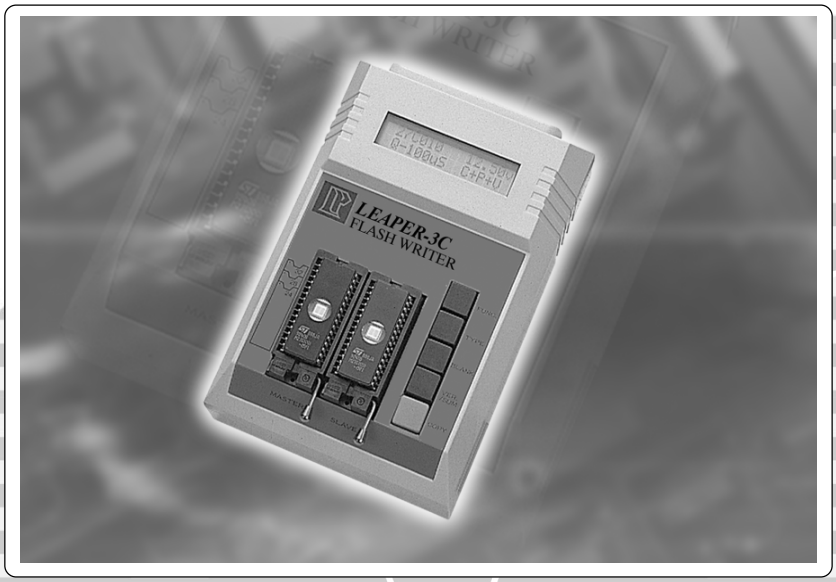

LEAPER-3C is specially designed for FLASH series, integrating powerful hardware and software to perform high quality . It is the best choice to program FLASH series device.
The most attraction of the LEAPER-3C is following 4T products policy, i.e. Light, Thin, Short, Tiny. Concerning the concept of environmental protection, the LEAPER-3C avoids unnecessary over-package. LEAP is doing her responsibility for the earth.

Features

- Small, portable, light & usable with batteries
- Stand-Alone FLASH programmer
- Only one source is needed to copy with.
- Two operation modes:stand-alone&PC mode
- Support Windows 95/98/NT/2000/ME/XP

Stand-Alone mode

- 5 Function keys
  Functions
  Type
  Blank check
  Verify & check sum
  Program
- IC parameters are adjustable such as programming algorithm, Vpp voltage, and impulse width.

PC based mode

- Connect with PC by USB port to transmit data and execute functions such as :
  Type/ Read/ Blank Check/ Program/Verify/Erase/ Disk/ Help/ Process/Parameter
- C parameters are adjustable such as programming algorithm, Vpp voltage, and impulse width.
- File formats supported:
  Binary and machine code, Intel HEX , Motorola HEX

Physical & Environmental Specification

- Display: LCD with 16 x 2 characters
- Dimension : 16cm × 11cm × 4.5cm
- Weight : 0.5Kgs
- Temperature : +5℃ to +45℃
- Humidity : up to 90% non-condensing
- Altitude : up to 5000m

Safety Standard

Meet CE requirement

Standard Accessories

- Main unit
- CD ROM (installation program and user's manual are included)
- USB cable
- 12V/500mA power adaptor

Optional accessories

- Various PLCC,TSOP,VSOP converters

Supported Devices

EPROM
27C64- 27C080
EEPROM
28C256-28C040
FLASH EPROM
29C256-29C040
29EE/LE512-29EE/LE020
28F256-28F020A
28SF/VF 040
29F010-29F040
29F001-29F002
39SF/VF512-39SF/VF040
49F512-49BF040
49F/LV001-49F/LV002

ESIS
Industrial Electronics
www.esis.com.au
Ph 02 9481 7420
Fax 02 9481 7267
esis.enq@esis.com.au